



CANTIDAD DE PUERTAS
NUMBER OF DOORS



MÁX. CARGA POR HOJA
MAX. DOOR WEIGHT



Min. 550mm
ANCHO DE PUERTA
DOOR GAP



Min. 20mm
ESPESOR DE PUERTA
DOOR THICKNESS



MADERA
WOOD




G° 1
G° 6
ANSI - BHMA
UNE - EN



100 HRS
TEST NIEBLA SALINA
SALT SPRAY TEST



Easy Soft DN80

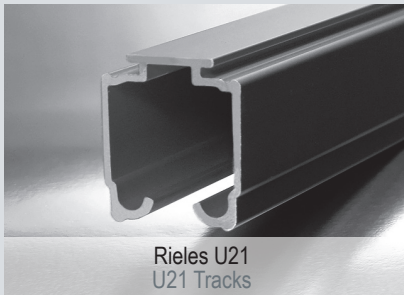

Rieles U21
U21 Tracks



Accesorio para puertas divisorias de ambiente de entre 50 y 80 Kg que permite cerrar la puerta de forma suave y segura.
 Accessory for atmosphere partition doors between 50 and 80 kg that allows to close them smoothly and safely.

USOS / APPLICATIONS

Divisiones de ambiente / Partitions


CUALIDADES

- I Para ser utilizado con puertas de madera con pesos desde 50 a 80 Kg.
- I La incorporación de un pistón sellado permite eliminar el uso de muelles prolongando la vida útil del sistema y garantizando la máxima suavidad en todo el recorrido.
- I Activador con barra de aluminio que permite ajustar la posición para una instalación mas fácil.

FEATURES

- I Can be used with wood doors with weights between 50 and 80 kg.
- I The addition of a sealed piston allows to eliminate the use of springs extending the life of the system and ensuring maximum softness trough the track.
- I Activator with aluminum bar that lets you adjust the position for an easy installation.

CONFIGURACIONES / SETUPS

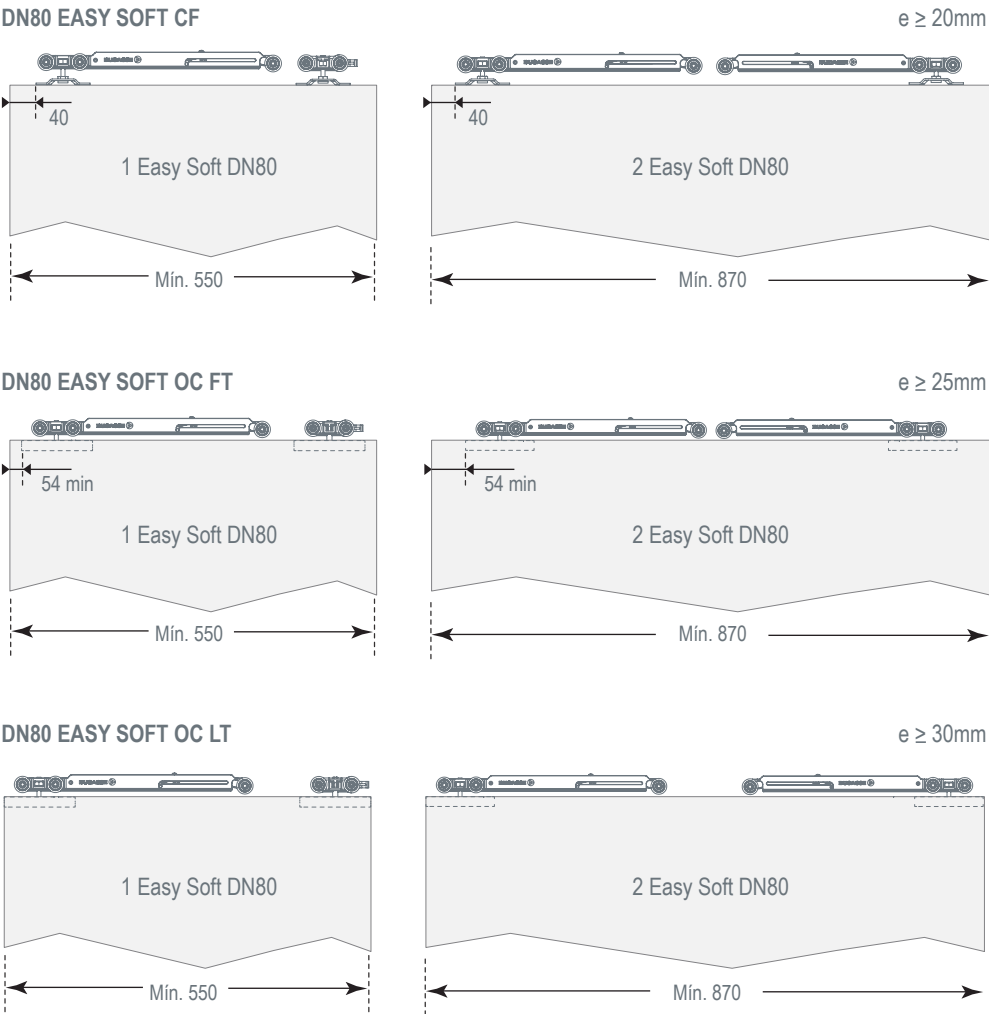


Todas las medidas están expresadas en milímetros. Estas medidas son sólo referencia, para instalación consulte instructivo de montaje. /
 All measurements are expressed in millimeters, they are only for reference. See the fitting instructions to install.


RIEL U21 / TRACK U21




RIEL U21 CON ALAS / TRACK U21 WITH WINGS

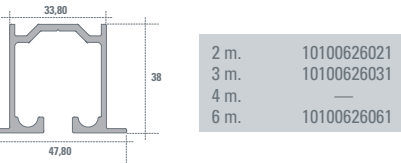

RIEL U21 RECTO / TRACK U21 FLAT

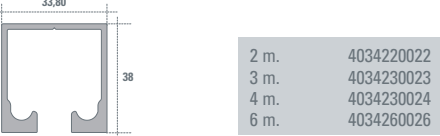

RIEL U21 DOBLE / DOUBLE TRACK U21

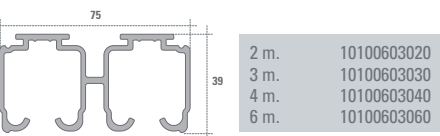

EASY SOFT DN80 CF
 1 SENTIDO / 1 WAY

EU801001

EASY SOFT DN80 CF
 2 SENTIDOS / 2 WAYS

EU801002

EASY SOFT DN80 OC FT
 1 SENTIDO / 1 WAY

EU801003

EASY SOFT DN80 OC FT
 2 SENTIDOS / 2 WAYS

EU801004

EASY SOFT DN80 OC LT
 1 SENTIDO / 1 WAY

EU801005

EASY SOFT DN80 OC LT
 2 SENTIDOS / 2 WAYS

EU801006